


# HRRHS Hi-Reliability Chip Resistor Arrays

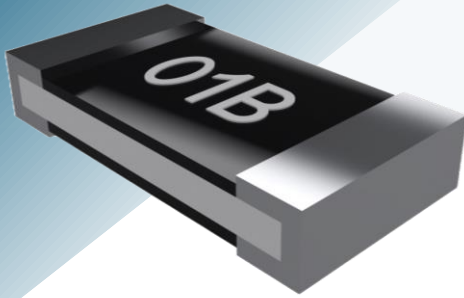

## FEATURES

- Thick film technology
- Power rating up to 3 watts at +70 °C
- High power surge withstanding
- Available with Sn, Sn/Pb, Au terminals
- MIL-PRF-55342 and Space Level screening available

## APPLICATIONS

- Aerospace
- Avionics
- Military
- Medical


## Electrical Characteristics

Characteristic	Model			
	HRRHS0603	HRRHS0805	HRRHS1206	HRRHS2512
Power Rating @ 70 °C	0.33 W	0.5 W	0.75 W	3 W
Operating Temperature Range	-55°C to +155°C			
Derated to Zero Load	+155 °C			
Maximum Working Voltage	75 V	200 V	250 V	250 V
Maximum Overload Voltage	125 V	300 V	500 V	500 V
Resistance Tolerance	±1 %, ± 5 %			
Temperature Coefficient				
10 ohms to 1 megohm (± 1%)	±100 PPM/°C	±100 PPM/°C	±100 PPM/°C	±100 PPM/°C
10 ohms to 1 megohm (± 5%)	±200 PPM/°C	±200 PPM/°C	±200 PPM/°C	±200 PPM/°C

## Product Dimensions

*mm*  
*(inches)*

Model	L	W	C	D	T
HRRHS0603	1.60 ± 0.010 (0.063 ± 0.004)	0.80 ± 0.10 (0.031 ± 0.004)	0.30 ± 0.20 (0.012 ± 0.008)	0.30 ± 0.20 (0.012 ± 0.008)	0.45 ± 0.10 (0.018 ± 0.004)
HRRHS0805	2.00 ± 0.10 (0.079 ± 0.004)	1.25 ± 0.10 (0.049 ± 0.004)	0.40 ± 0.20 (0.016 ± 0.008)	0.40 ± 0.20 (0.016 ± 0.008)	0.50 ± 0.10 (0.020 ± 0.004)
HRRHS1206	3.10 ± 0.10 (0.122 ± 0.004)	1.60 ± 0.10 (0.063 ± 0.004)	0.50 ± 0.25 (0.020 ± 0.010)	0.50 ± 0.25 (0.020 ± 0.010)	0.55 ± 0.10 (0.022 ± 0.004)
HRRHS2512	6.40 ± 0.20 (0.252 ± 0.008)	3.10 ± 0.20 (0.122 ± 0.008)	0.45 ± 0.25 (0.018 ± 0.010)	1.80 ± 0.25 (0.071 ± 0.010)	1.10 ± 0.20 (0.043 ± 0.008)





## Recommended Pad Layout

*mm*  
*(inches)*


## Construction

Model	A	B	L
HRRHS0603	0.90 (0.035)	1.00 (0.039)	3.00 (0.118)
HRRHS0805	1.30 (0.051)	1.15 (0.045)	3.50 (0.138)
HRRHS1206	1.80 (0.071)	1.30 (0.051)	4.70 (0.185)
HRRHS2512	3.70 (0.146)	2.45 (0.096)	7.60 (0.299)

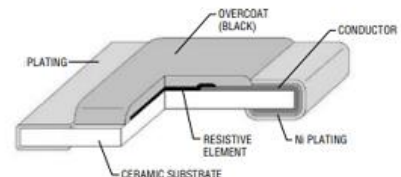


# AEM, INC.'s HRRHS Hi-Reliability Chip Resistor Arrays

## Surge Performance

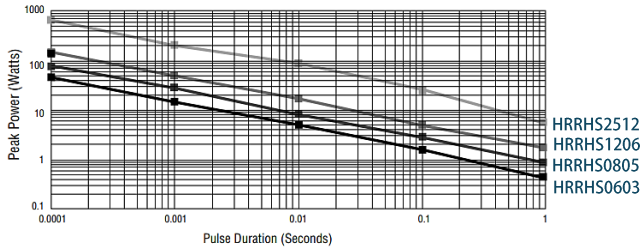

## Derating Curve

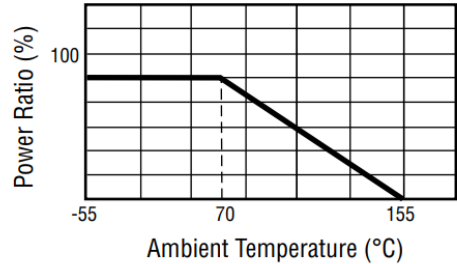

## Typical Part Marking

HRRHS0603, HRRHS0805,  
HRRHS1206, HRRHS2512

± 5% (E24)  
3 digits identify the  
resistance value



301 -  $30 \times 10^1 = 300$   
ohms

HRRHS0603

± 1% (E24)  
3 digits identify the  
resistance value



222 -  $22 \times 10^2 =$   
2.2K ohms

HRRHS0805, HRRHS1206,  
HRRHS2512


± 1% (E24 / E96)  
4 digits identify the  
resistance value



1542 -  $154 \times 10^2 = 15.4K$   
ohms


HRRHS0603

± 1% (E96)  
3 digits identify the  
resistance value



01B = 1K ohms  
(Refer to Marking Table  
below)

## Soldering Profile

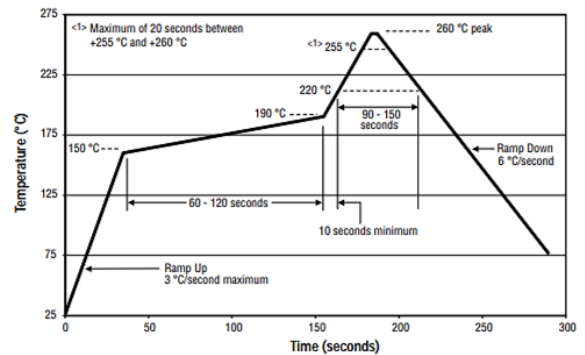

## E96 Marking for HRRHS, 1%

Code	R Value	Code	R Value	Code	R Value	Code	R Value	Code	R Value	Code	R Value	Code	R Value	Code	R Value
01	100	13	133	25	178	37	237	49	316	61	422	73	562	85	750
02	102	14	137	26	182	38	243	50	324	62	432	74	576	86	768
03	105	15	140	27	187	39	249	51	332	63	442	75	590	87	787
04	107	16	143	28	191	40	255	52	340	64	453	76	604	88	806
05	110	17	147	29	196	41	261	53	348	65	464	77	619	89	825
06	113	18	150	30	200	42	267	54	357	66	475	78	634	90	845
07	115	19	154	31	205	43	274	55	365	67	487	79	649	91	866
08	118	20	158	32	210	44	280	56	374	68	499	80	665	92	887
09	121	21	162	33	215	45	287	57	383	69	511	81	681	93	909
10	124	22	165	34	221	46	294	58	392	70	523	82	698	94	931
11	127	23	169	35	226	47	301	59	402	71	536	83	715	95	953
12	130	24	174	36	232	48	309	60	412	72	549	84	732	96	976

This table shows the first two digits for the three-digit E96 part marking scheme. The third character is a letter multiplier:  
A=10<sup>0</sup> B=10<sup>1</sup> C=10<sup>2</sup> D=10<sup>3</sup> E=10<sup>4</sup> X=10<sup>-1</sup>

# AEM, INC.'s HRRHS Hi-Reliability Chip Resistor Arrays

AEM PN	Package Size	Resistance Code	Resistance Value (Ohms)	Resistance Tolerance	TCR	Screening Options	Terminal Code
HRRHS0603-1000FX	0603	1000	100	1%	X	X	XX
HRRHS0603-1001FX	0603	1001	1K	1%	X	X	XX
HRRHS0603-1002FX	0603	1002	10K	1%	X	X	XX
HRRHS0603-1003FX	0603	1003	100K	1%	X	X	XX
HRRHS0603-10R0FX	0603	10R0	10	1%	X	X	XX
HRRHS0603-1200FX	0603	1200	120	1%	X	X	XX
HRRHS0603-1500FX	0603	1500	150	1%	X	X	XX
HRRHS0603-1501FX	0603	1501	1.5K	1%	X	X	XX
HRRHS0603-15R0FX	0603	15R0	15	1%	X	X	XX
HRRHS0603-2200FX	0603	2200	220	1%	X	X	XX
HRRHS0603-2201FX	0603	2201	2.2K	1%	X	X	XX
HRRHS0603-2202FX	0603	2202	22K	1%	X	X	XX
HRRHS0603-22R0FX	0603	22R0	22	1%	X	X	XX
HRRHS0603-2700FX	0603	2700	270	1%	X	X	XX
HRRHS0603-3300FX	0603	3300	330	1%	X	X	XX
HRRHS0603-3301FX	0603	3301	3.3K	1%	X	X	XX
HRRHS0603-3302FX	0603	3302	33K	1%	X	X	XX
HRRHS0603-33R0FX	0603	33R0	33	1%	X	X	XX
HRRHS0603-4700FX	0603	4700	470	1%	X	X	XX
HRRHS0603-4701FX	0603	4701	4.70K	1%	X	X	XX
HRRHS0603-47R0FX	0603	47R0	47	1%	X	X	XX
HRRHS0603-5101FX	0603	5101	5.1K	1%	X	X	XX
HRRHS0603-5601FX	0603	5601	5.6K	1%	X	X	XX
HRRHS0603-7500FX	0603	7500	750	1%	X	X	XX
HRRHS0603-220JW	0603	220	22	5%	W	X	XX
HRRHS0603-1R00FW	0603	1R00	1.00	1%	W	X	XX
HRRHS0805-1000FX	0805	1000	100	1%	X	X	XX
HRRHS0805-1001FX	0805	1001	1K	1%	X	X	XX
HRRHS0805-1002FX	0805	1002	10K	1%	X	X	XX
HRRHS0805-1003FX	0805	1003	100K	1%	X	X	XX
HRRHS0805-10R0FX	0805	10R0	10.0	1%	X	X	XX
HRRHS0805-1200FX	0805	1200	120	1%	X	X	XX

\* A list of all additional part numbers are provided upon inquiry.

## Standard Screening Options

- Option 1: 100% visual inspection per MIL-PRF-55342, AS9102 FAIR, MIL-STD-1580 DPA.
- Option 2: 100% Group A and B Screening per MIL-PRF-55342, AS9102 FAIR, MIL-STD-1580 DPA (see AEM detail specification for more details).
- Option 3: 100% Group A, B, and C Screening per MIL-PRF-55342, AS9102 FAIR, MIL-STD-1580 DPA (see AEM detail specification for more details).
- Option 4: 100% Group A, B, and Qualification Screening per MIL-PRF-55342, AS9102 FAIR, MIL-STD-1580 DPA (see AEM detail specification for more details).
- Option 5: Customer Source Control Drawing (SCD) defined screening. AEM will customize screening based on customer requirements.

## Ordering Information

HRRHS 0603 - 103 J W 1 PB

HRRHS - Hi-Reliability Chip Resistor Arrays

0603 - EIA Package Size

103 - Resistance Code

J - Resistance Tolerance (F = 1% , J = 5%)

W - TCR (W = ± 200 PPM/°C, X = ± 100 PPM/°C)

Screening Options: 1, 2, 3, 4, 5 (see screening options on the left)

Terminal Code: PB - Sn/Pb plated; SN - Sn plated; AU - Au plated

